

PLS1 Series

Petroleum Luminaire Series

Product Description

The low profile design of the PLS1 Series Low Glare LED Petroleum luminaire is designed to exceed standards for all petroleum applications with the lowest possible power consumption. The new Low Glare design keeps light pleasant for patrons while maintaining great coverage. The durable and robust design allows for simple installation. Delivering up to 15,193 lumens while only consuming 118 watts, it's the ideal solution for petroleum stations.


Applications: Petroleum station lighting.

Product Performance

- Wattage Range: 82W-118W
- Input Voltage: 120-277VAC, 277-480VAC
- CCT: 3000K - 5000K
- CRI: Minimum 70 CRI
- UL1598 Compliant
- IP66 Rated
- 5 year Warranty



Shown with optional Occupancy Sensor

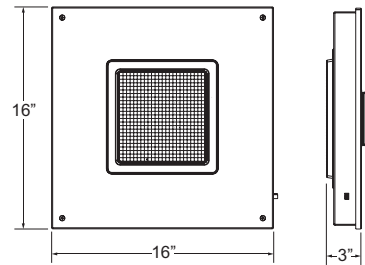

Fixture Weight: 14 lbs

Ordering Guide

Example: PLS1-DP16050K7-WH-OC1

Series	Distribution	Lumen Output Type	CCT Code	Voltage	Fixture Color	Options
PLS1 - 16"	DP - Diffused Canopy	100 - 9,843 Lumens, 82W 160 - 15,193 Lumens, 118W	30K8 - 3000K, 80 CRI 40K7 - 4000K, 70 CRI 50K7 - 5000K, 70 CRI	(Blank) - 120-277V UH - 277-480V	WH - White BZ - Bronze SV - Silver	OC1 - Occupancy Sensor SP277 - 10Kv Surge Suppression

Accessories (Field installed, order as separate line item)

Accessory Number	Description
PL-TP2424	24" x 24" Beauty Plate Kit (with 4" Center Hole)
PL-TP2626	26" x 26" Beauty Plate Kit (with 4" Center Hole)
PL-TP2632	26" x 32" Beauty Plate Kit (with 4" Center Hole)
PL-JBS01	Junction Box Kit (includes J-Box and Stem)



PLS1 Series

Product Specifications

Construction & Materials

- Powder Coated Aluminum Housing
- UV Stabilized single Polycarbonate Lens
- Robust low profile design with active thermal management
- Petroleum mounting open canopy

Optical System

- DP Lens - Type V Low Glare Medium Canopy Lens

Electrical System

- Input Voltage: 120-277VAC or 277-480VAC
- Power Factor: > 0.95
- Total Harmonic Distortion: ≤10%
- Operating Temperature Range: -40°C to 60°C
- Standard Surge Suppression: 10Kv

Testing & Certifications


- UL1598, CSA STD.22.2 compliant
- IP66 Rated
- RoHS Compliant
- FCC Compliant
- DesignLights Consortium® Qualified Product

Lumen Maintenance

- L90@ 25C >50,000 hours

Photometry

All published photometric testing data is performed to IESNA LM79-08 standards by a NVLAP accredited laboratory. To obtain an IES file specific to your project contact sales@eluminaire.com.

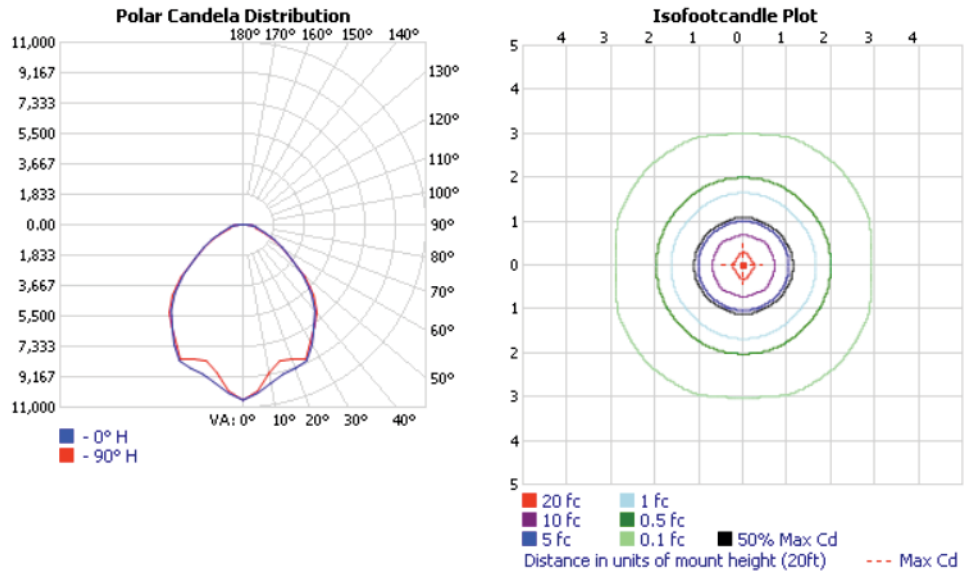

eluminaire maintains a tolerance of +/- 7% on flux and power measurement. The information in this document is subject to change without notice.

Diffused Canopy Distribution

Fixture Configuration	Lumens	Lumens Per Watt	Wattage	CCT	CRI	BUG
PLS1-DP-100-30K8-XX	7,953	99	80	3000K	80	B3-U2-G2
PLS1-DP-100-40K7-XX	9,682	120	80	4000K	70	B3-U2-G2
PLS1-DP-100-50K7-XX	9,682	120	80	5000K	70	B3-U2-G2
PLS1-DP-160-30K8-XX	13,166	111	118	3000K	80	B3-U2-G2
PLS1-DP-160-40K7-XX	15,193	128	118	4000K	70	B3-U2-G2
PLS1-DP-160-50K7-XX	15,193	128	118	5000K	70	B3-U2-G2
PLS1-DP-100-30K8-UH-XX	8,597	104	82	3000K	80	B3-U2-G2
PLS1-DP-100-40K7-UH-XX	9,843	120	82	4000K	70	B3-U2-G2
PLS1-DP-100-50K7-UH--XX	9,843	120	80	5000K	70	B3-U2-G2
PLS1-DP-160-30K8-UH-XX	13,030	104	125	3000K	80	B3-U2-G2
PLS1-DP-160-40K7-UH-XX	14,881	120	124	4000K	70	B3-U2-G2
PLS1-DP-160-50K7-UH-XX	14,881	120	124	4000K	70	B3-U2-G2